

# PRODUCT SPECIFICATION

## WALL MOUNT OUTLET

### INTRODUCTION

LUX's wall-mount outlet is deployed in various type of FTTx applications such as FTTH, FTTD etc. This outlet is for terminating optical fiber cables to pigtails at the fiber demarcation point.

The wall mount outlet is available in LC and SC adapter. This compact space-saving design is ideal for space constrained areas.



### TECHNICAL INFORMATION

**Dimension** 86 (H) x 86(W) x 20(D) mm

**Capacity** Max: 2 Ports

**Material** ABS (UL94-V0)

**Color** White

**Package** 10pcs per pack

### ENVIRONMENTAL PROPERTIES

**Storage and shipment temperature:** - 20°C to 60°C


**Operating and Installation temperature:** - 10°C to 60°C

### REFERENCE STANDARDS

**Restriction of Hazardous Substances (RoHS) Compliance:** All materials & components meet the requirements of Directive 2002/95/EC.

### ORDERING PART NUMBER

Example: WMO-02SC = 2 ports SC Simplex

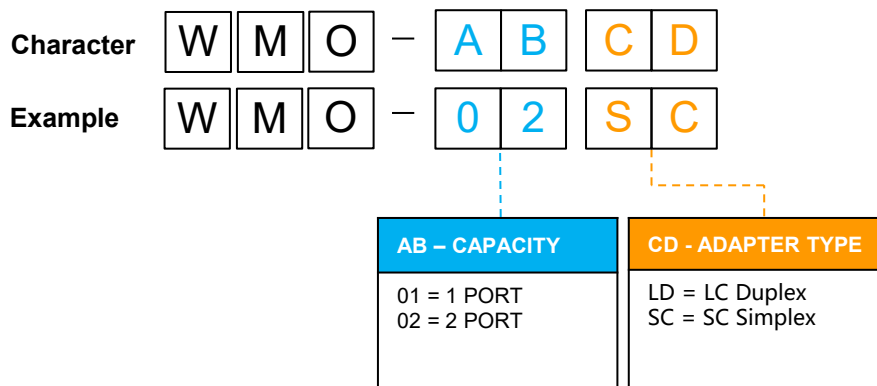

The information and specification in this document are subjected to change without notice