




## PRODUCT SPECIFICATION

### U/UTP CABLE, CATRGORY 5e (100MHz), LSZH SHEATH

#### INTRODUCTION


Lux Category 5e U/UTP Copper Network Cabling Solution carries up to one Gigabit of data per second over an Ethernet channel within 100m of cable segment. The solution is quick and easy to install with no special installation tools required.

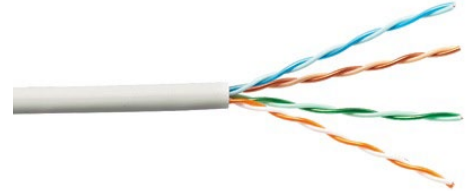

#### CAT5e U/UTP CABLE

The 4-pair Category 5e U/UTP cable is composed by 24 AWG (0.49) solid bare copper conductors and fully complied with ISO/IEC11801 Class D and TIA/EIA-568-D.2 standards.

The cable sheath is marked with meter which allows simple and easy calculation of the cable remaining in the box. A cable measurement record table is printed on each box to help installers keep track of the lengths used.

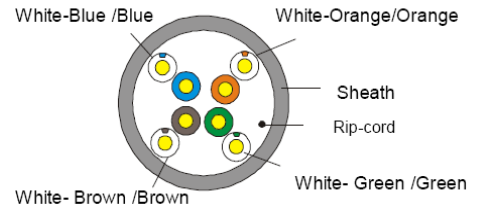

The solution is suitable for all Category 5e copper network cabling.

#### FEATURES

- Conforms to Category 5e standards
- 24 AWG bare solid copper conductor
- Available in PVC or LSZH jacket
- 25-year system warranty available

#### REFERENCE STANDARDS

- RoHs/REACH complied
- Flame Test: IEC60332-1
- Acid Gas Test: IEC60754-1&2
- Smoke Test: IEC61034-1&2
- ISO/IEC 11801 Class D; TIA/EIA-568-D.2

#### APPLICATIONS

- 10BASE-T (Ethernet)
- 100BASE-T (Fast Ethernet)
- 1000BASE-T (Gigabit Ethernet)
- Supports IEEE 802.3bt (90W)

#### SPECIFICATIONS

<b>Product Number:</b>	CCUU5E004LSZXX (XX = Color Code)	<b>Electrical Characteristics (20°C)</b>	1.0-100MHz Impedance (Ω) 100±15 1.0-100MHz Delay Skew (ns/100m) ≤ 45 DC Resistance (Ω/100m) max: 9.5 DC Conductor Resistance Unbalance (%) max 5.0
<b>Category:</b>	CAT5e	<b>Packing:</b>	Carton Box
<b>Conductor:</b>	Solid Bare Copper 0.49mm Norm O.D. ±0.005	<b>Carton:</b>	35cm*35cm*20cm
<b>Insulation:</b>	HDPE; Diameter 0.87±0.03mm	<b>Packing Length:</b>	305±1.5m
<b>Sheath:</b>	Thickness: 0.50±0.05mm External O.D.: 5.0± 0.4mm Surface: Clean, Frap, Satiation Material: LSZH Color: According to the requirement	<b>Rip-cord:</b>	Yes
<b>Surface Printing:</b>	Letter height: 3.0±0.3mm Color: Black Print error & space: ≤ ±0.5%, 1m	<b>Drain Wire:</b>	No
<b>Core Color</b>	1 White-Blue/Blue; 2 White-Orange/Orange 3 White-Green/Green; 4 White-Brown/Brown	<b>Installation Temperature:</b>	-10°C ~ +60°C
		<b>Operation Temperature:</b>	-15°C ~ +70°C



The information and specification in this document are subjected to change without notice