



**COMMUNICATIONS**

*Let's Get Connected*

# PRODUCT SPECIFICATION


## WALL MOUNT CABINET

### INTRODUCTION

LUX's wall mount cabinets are compatible with 19" EIA/ECA-310 standard and available in the size of 4U, 6U, 9U, 12U, 15U, 18U and 21U with static loadings of 60kg. Standard in tempered glass front door, perforated door, perforated door is available as an optional item.


Cabinets are made of cold steel or aluminum with supreme black powder coating protection to prevent it from scratch and rust. The wall mount cabinet is IP20 rated and suitable for housing the 19"EIA standard networking devices or cabling patch panels within the corridor, closet or duct room areas.

All wall mount cabinets provide flexibility and scalability for future integration with our cable ladder, fiber raceway and aisle solutions.

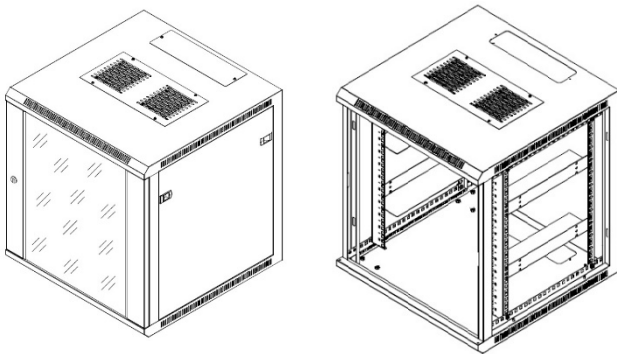


### FEATURES

- Wall Mount: 4U, 6U, 9U, 12U, 15U, 18U and 21U Height
- 19" EIA/ECA-310 Standard
- Available in 600mm, 500mm and 450mm depth
- Standard with tempered glass front door, option of perforated door
- Fully welded frame structure
- Top and bottom cable entry
- Security Lockable door
- Quick release side panel;
- Fully Integrated with Cabling and Cable Management Solutions
- Customization available

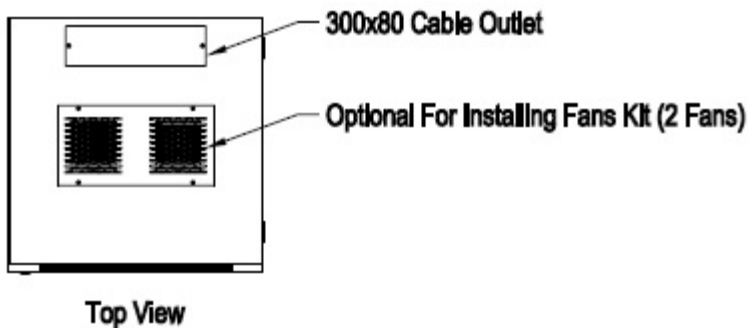

**Top View**

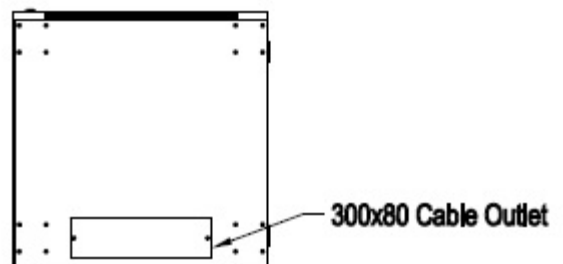

**Bottom View**

*Above Example : 12U 600(W) x 500(D)mm Drawing*


The information and specification in this document are subjected to change without notice





# COMMUNICATIONS

Let's Get Connected

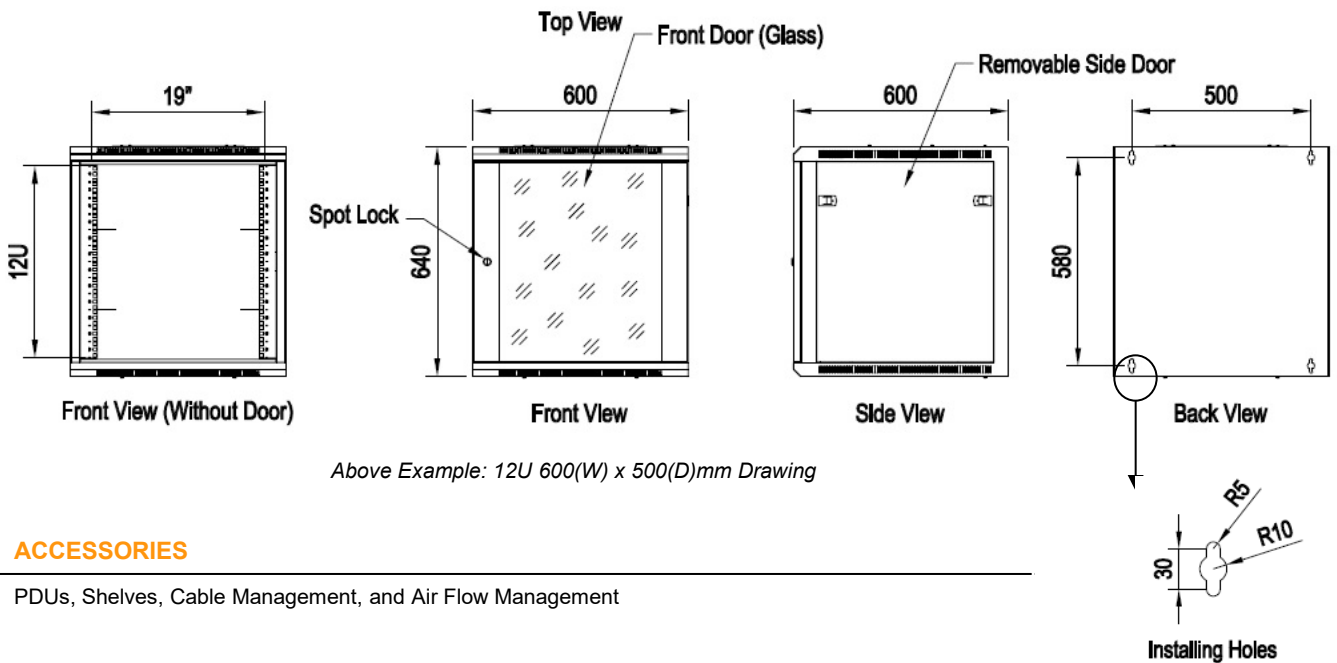

## ACCESSORIES

PDUs, Shelves, Cable Management, and Air Flow Management

## SPECIFICATIONS

<b>Static Loading:</b>	60kg
<b>Color:</b>	Black power coating
<b>Frameworks:</b>	SPCC 1.2mm with welded frame structure
<b>Front, Rear &amp; Side Supporting Channel:</b>	SPCC 2.0mm
<b>Front &amp; Rear 19" Mounting Channel:</b>	Front & rear vertical channels with U marking
<b>Front Door:</b>	Lockable tempered glass door
<b>Rear Door:</b>	SPCC 1.2mm
<b>Side Door:</b>	SPCC 1.2mm; Quick release side panel
<b>Top Panel:</b>	SPCC 1.2mm; Cable entry (300x80mm) with blank plate to seal the cable entry. Available with roof mount fan units
<b>Bottom Panel:</b>	SPCC 1.2mm Cable entry (300x80mm) with blank plate to seal the cable entry
<b>Others:</b>	Earthing kit x 1set M6 fixing screws & nuts x 50pcs



The information and specification in this document are subjected to change without notice

ORDERING PART NUMBER

Example: WM-04U66SD = 4U Wall mount cabinet, 600(W)x 600(D)x 280(H), Standard

Character	W	M	C	—	A	B	C	D	E	S	D
Example	W	M	C	—	0	4	U	6	6	S	D

ABC – HEIGHT (U)	DE – DIMENSIONS
04U = 4U, 280(H) 06U = 6U, 365(H) 09U = 9U, 500(H) 12U = 12U, 640(H) 15U = 15U, 770(H) 18U = 18U, 905(H) 21U = 21U, 1040(H)	63 = 600(W) x 365(D) 64 = 600(W) x 450(D) 68 = 600(W) x 480(D) 65 = 600(W) x 500(D) 66 = 600(W) x 600(D)

The information and specification in this document are subjected to change without notice

