



PRODUCT SPECIFICATION

OUTDOOR WALL MOUNT DISTRIBUTION BOX

INTRODUCTION

LUX's Outdoor Wall Mount Distribution Box is designed for terminating, splicing and interconnecting up to 96 fiber optical cables with FC/SC/ST connectors or 192 fiber with LC connector in outdoor environment.

The terminal can be adapted to applications by mounting the enclosure to the exterior surface and connecting between the distribution and drops.



TECHNICAL INFORMATION

Max. Capacity	Size 1: 192 port (LC) or 96 port (FC/SC/ST) Size 2: 48 port (LC) or 24 port (FC/SC/ST) Size 3: 24 port (LC) or 12 port (FC/SC/ST)
Dimension	Size 1: 400(H) x 500(W) x 200(D) mm Size 2: 300 (H) x 400(W) x 100(D) mm Size 3: 200 (H) x 230(W) x 58(D) mm
Material	Steel
Color	Grey (RAL 7035) / Black (RAL 9004)
Accessories	Screw / Velcro Strap / Splice tray

ENVIRONMENTAL PROPERTIES


Storage and shipment temperature:	- 20°C to 70°C
Operating and Installation temperature:	- 20°C to 70°C
Restriction of Hazardous Substances (RoHS) Compliance:	All materials & components meet the requirements of Directive 2002/95/EC.

FEATURES & BENEFITS

- Quick & Easy installation
- IP 65 Rated
- FC/LC/SC/ST available for option
- Security lock

ORDERING PART NUMBER

Example: FIPWMA-12-FC-GY-S = 12port FC SM IP65 Outdoor Wall Mount Distribution Box (Grey Size 3)

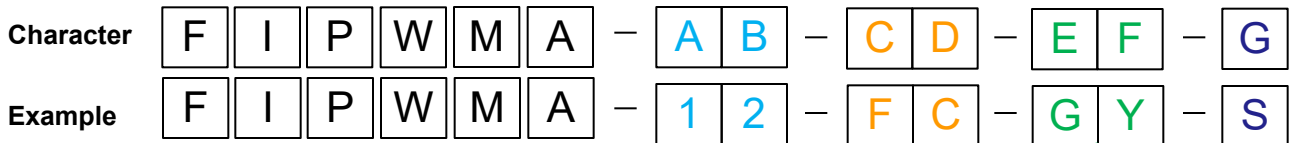

AB - CAPACITY		CD - ADAPTER TYPE		EF - COLOR		GH - SIZE	
ZZ = Empty	96 = 96 port	FC = FC		GY = Grey		L = Size 1 (Max: 96port FC/SC/ST)	
12 = 12 port	H4 = 144 port	LC = LC		BL = Black		M = Size 2 (Max: 24port FC/SC/ST)	
24 = 24 port	H9 = 192 port	SC = SC				S = Size 3 (Max: 12port FC/SC/ST)	
48 = 48 port		ST = ST					

The information and specification in this document are subjected to change without notice