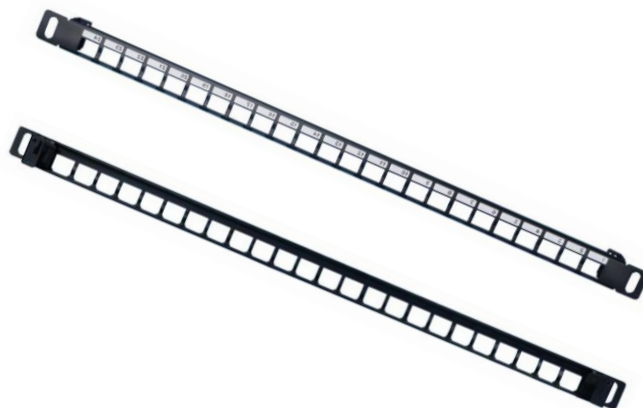# PRODUCT SPECIFICATION
½ U UTP PATCH PANEL

INTRODUCTION

Lux offers a compact size ½ U copper patch panel that accept all RJ45 keystone jacks. The patch panels are available in unloaded type, which provides flexibility in design, MAC and maintenance.

½ U UTP PATCH PANEL

Panels are built-in with strain relief bar for easy cable management and proper cable care. Dedicated areas for port and panel identification.

The associated transmission performance is fully complied with the ISO 11801 and ANSI/TIA/EIA 568 D.2 standard based on different type of RJ45 Keystone Jacks.

FEATURES

- Save space and rack unit
- Accepts all RJ45 keystone jacks
- Include rear cable management bar
- Area for port identification and flexible for future upgrade
- Accepts 22-24 AWG solid or stranded cable copper conductor
- 25-years system warranty available

REFERENCE STANDARDS

- RoHs/REACH complied
- TIA/EIA-568-D.2; ISO 11801
- UL 1863 safety listed

APPLICATIONS

- 10BASE-T (Ethernet);
- 100BASE-T (Fast Ethernet);
- 1000BASE-T (Gigabit Ethernet);
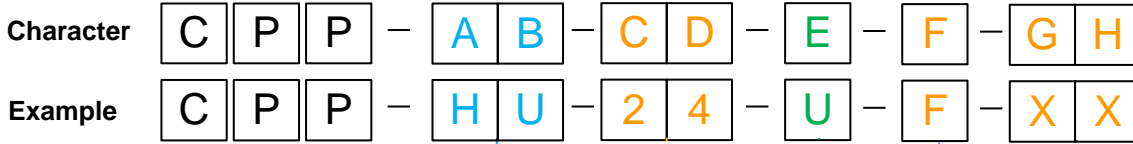- Any other Cat5e/ Cat6/ Cat6A applications

SPECIFICATIONS (PATCH PANEL)

Panel:	SPCC 1.5mm thickness
Strain Relief Bar:	SPCC 1.5mm thickness
Color:	Black
Label:	Dedicated areas allow for port identification
Category:	CAT5e, CAT6 and CAT6A

PRODUCT NUMBER

Example: CPP-HU-24-U-F-XX = ½U 24port UTP Patch Panel, Flat, Blank Panel

Character	C	P	P	–	A	B	–	C	D	–	E	–	F	–	G	H
Example	C	P	P	–	H	U	–	2	4	–	U	–	F	–	X	X

AB – HEIGHT (U)	CD - PORT	E – SPECIFICATION	F – FLAT	GH – BLANK PANEL
HU = ½ U	24 = 24 PORT	U = UTP (Unshielded) S = STP (Shielded)	F = FLAT	XX = BLANK PANEL 5E = CAT5E 6X = CAT6 6A = CAT6A

The information and specification in this document are subjected to change without notice