

# PRODUCT SPECIFICATION

## UNSHIELDED CATEGORY 6<sub>A</sub> KEYSTONE JACK



### INTRODUCTION

Lux's Cat6<sub>A</sub> (Augmented) Unshielded Keystone Jacks can be used for installing into faceplate, unloading shuttered module or UTP patch panel.

### CAT6<sub>A</sub> UNSHIELDED KEYSTONE JACK

The keystone jack is for terminating 4-pairs U/UTP CAT6<sub>A</sub> cable. The keystone jack accepts 22-24 AWG cable with a universal color code labelled for T568A and T568B wiring schemes. It is also suitable for 22-24 AWG stranded and solid wire.


The CAT6<sub>A</sub> transmission performance is fully complied with the ISO 11801 Class E<sub>A</sub> and ANSI/TIA/EIA 568 D.2 standard. Available in different colors.

### APPLICATIONS

- 10BASE-T (Ethernet)
- 100BASE-T (Fast Ethernet)
- 1000BASE-T (Gigabit Ethernet)
- IEC802.3

### SPECIFICATIONS

<b>Product Number:</b>	CJU6A08-BK (Black) CJU6A08-WH (White)
<b>Category:</b>	CAT6 <sub>A</sub>
<b>Housing:</b>	High-Impact, Flame-Retardant Plastic, UL94V-0
<b>Spring Wire:</b>	Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
<b>IDC:</b>	Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy
<b>Insertion / Extraction Life:</b>	750 Cycles Minimum
<b>Operation Temperature:</b>	-10°C ~ +60°C
<b>Electrical Characteristics :</b>	Electrical insulation resistance: 500MΩ min. @ 100V d.c Dielectric withstand voltage: 1000V d.c. a.c. Peak Contact to Contact @ 60Hz for 1 minute

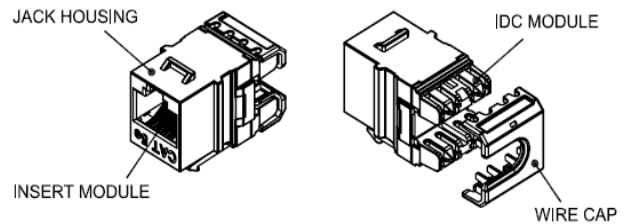

### FEATURES

- Conforms to Category 6A standards
- Accepts 22-24 AWG solid or stranded cable copper conductor
- Universal color code labelled for TIA568A and TIA568B wiring schemes
- LSA compatible IDC
- 25-year system warranty available

### REFERENCE STANDARDS

- RoHs/REACH complied
- TIA/EIA-568-D.2; ISO 11801 Class E<sub>A</sub>; IEC 60603-7-41

The information and specification in this document are subjected to change without notice