PRODUCT SPECIFICATION
CATEGORY 6A UTP STAGGERED PATCH PANEL

INTRODUCTION

Lux's Category6A staggered unshielded modular patch panel accepts Cat.6A UTP RJ45 keystone jacks. The 19" mounting patch panel is available in 1U (24-ports) height. The patch panels are available in unloaded type that provides flexibility in design, MAC, and maintenance.

CATEGORY 6A UTP PATCH PANEL

All panels are built-in with a strain relief bar for easy cable management and proper cable care. Dedicated areas for port and panel identification.

The associated transmission performance fully complies with the ISO 11801 and ANSI/TIA/EIA 568 D.2 standard.

FEATURES

- Accepts Cat.6A UTP RJ45 keystone jacks
- Built-in strain relief bar
- Area for port identification and flexible for future upgrade
- Accepts 22-24 AWG solid or stranded cable copper conductor
- 25-years system warranty available

REFERENCE STANDARDS

- RoHs/REACH complied
- TIA/EIA-568-D.2; ISO 11801

APPLICATIONS

- 10BASE-T (Ethernet)
- 100BASE-T (Fast Ethernet)
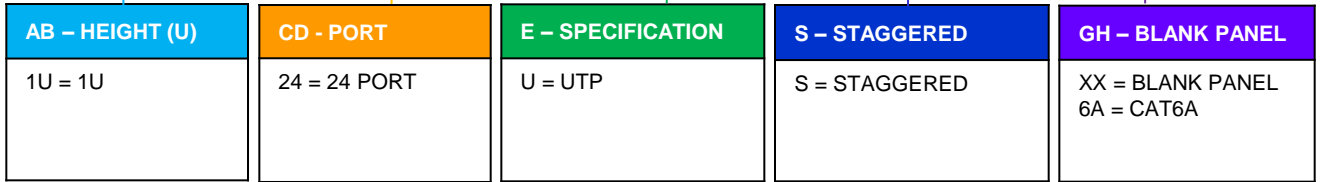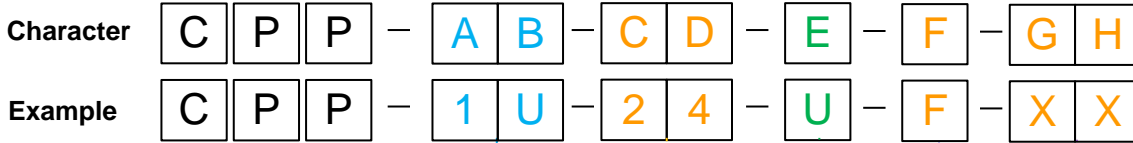- 1000BASE-T (Gigabit Ethernet)
- Cat6A applications

SPECIFICATIONS (PATCH PANEL)

Panel:	SPCC 1.5mm thickness
Strain Relief Bar:	SPCC 1.5mm thickness
Color:	Black
Label:	Dedicated areas for port identification
Category:	CAT6A

PRODUCT NUMBER

Example: CPP-1U-24-U-S-XX = 1U 24port UTP Staggered Patch Panel, Flat, Blank Panel

Character	C	P	P	–	A	B	–	C	D	–	E	–	F	–	G	H
Example	C	P	P	–	1	U	–	2	4	–	U	–	F	–	X	X

AB – HEIGHT (U)	CD - PORT	E – SPECIFICATION	S – STAGGERED	GH – BLANK PANEL
1U = 1U	24 = 24 PORT	U = UTP	S = STAGGERED	XX = BLANK PANEL 6A = CAT6A